Declaration of Conformity

We, Manufacturer

ZIPPY TECHNOLOGY CORP.
10F,No.50,MIN CHYUAN RD.
SHIN-TIEN, TAIPEI HSIEN
TAIWAN, R.O.C.

declare that the product
(description of the apparatus, system, installation to which it refers)

SWITCHING POWER SUPPLY

MRG-5800V4V

is in conformity with
(reference to the specification under which conformity is declared)
i in accordance with 2004/108/EC-EMC Directive

- ■EN 55022 : 2006+A1/2007
  Information technology equipment
  -Radio disturbance characteristics
  -Limits and methods of measurement
- ■EN 55024 : 1998+A1/2001+A2/2003
  Information technology equipment
  -Immunity characteristics
  -Limits and methods of measurement
- ■EN 61000-4-2 : **2009** Criteria B
  Electrostatic discharge
  requirements "ESD"
- ■EN 61000-4-3 : 2006**+A1/2008** Criteria A
  Radiated, radio frequency
  electromagnetic field
- ■EN 61000-4-4 : 2004 Criteria B
  Electrical fast transient
  requirements "EFT"
- ■EN 61000-4-5 : 2006 Criteria B
  Surge Immunity
  requirements
- ■EN 61000-4-6 : 2007 Criteria A
  Conducted Immunity
- ■EN 61000-4-8 : 1993+A1/2001 Criteria A
  Power Frequency Magnetic
  Field Immunity
- ■EN 61000-4-11 : 2004
  Dip Criteria B
  Interruptions Criteria C
  Voltage Dip,interruptions
  Immunity requirements
- ■EN 61000-3-2 : 2006
  Harmonic current
  requirements
- ■EN 61000-3-3 : **2008**
  Voltage fluctuations
  and flicker
  requirements

Manufacturer	
Date :	SEP,02,2010
Signature:	Melon Lin
Name:	ZIPPY

Test-Lab	
Date :	SEP,02,2010
Signature:	Karen
Name:	ZIPPY

APPLICATION FOR CERTIFICATION

ON Behalf Of

ZIPPY TECHNOLOGY CORP.

SWITCHING POWER SUPPLY

Model# : **MRG-5800V4V**

FCCID:N/A

PREPARED FOR：

ZIPPY TECHNOLOGY CORP.
10F,No.50,MIN CHYUAN RD.
SHIN-TIEN, TAIPEI HSIEN
TAIWAN, R.O.C

REPORT BY：

ZIPPY TECHNOLOGY CORP.
10F,No.50,MIN CHYUAN RD.
SHIN-TIEN, TAIPEI HSIEN
TAIWAN, R.O.C
TEL： (02)2918-8512
FAX：(02)2913-4969

TABLE OF CONTENTS

Description Page

1. Test Report Certification…….. 5
2. General Information…….. 6
2.1 Production Description…….. 6
2.2 Tested System Details…….... 7
2.2.1 Resistor Load…….. 7
2.3 Test Methodology…….. 7
2.4 Test Facility…….. 7
3. Electronic-Magnetic Interference Test…….. 8
3.1. Conducted Power Line Test…….. 8
3.1.1 Test Equipments…….. 8
3.1.2 Block Diagram of Test Setup…… 8
3.1.3 Conducted Powerline Emission Limit…….. 9
3.1.4 EUT Configuration on Measurement…… 9
3.1.5 EUT Exercise Software…….. 9
3.1.6 Conducted Emission Data…….. 9
3.2. Radiation Emission Test 11
3.2.1 Test Equipment 11
3.2.2 Test Setup 11
3.2.3 Radiated Emission Limited 12
3.2.4 EUT Configuration 13
3.2.5 Operating Condition of EUT 13
3.2.6 Radiated Emission Data 13
3.2.7 Test Photo and Setup 13
4. ESD Measurement…….. 17
4.1 Test Equipments…….. 17
4.2 Test Setup…….. 17
4.2.1 Block Diagram of Connections between EUT and simulators…….. 17
4.2.2 Test Setup of EUT…….. 17
4.3 Severity Levels…… 18
4.4 EUT Operating Condition…….. 18
4.5 Test Procedure…….. 18
4.6 Test Method…….. 18
4.7 Test Result…….. 19

TABLE OF CONTENTS

Description Page

5. Radiated Susceptibility Measurement……. 20
5.1 Test Equipment…….…... 20
5.2 Block Diagram of Test Setup…… 20
5.3 Severity Levels……..…….. 21
5.4 EUT Operating Condition…….. 21
5.5 Test procedure……..……..…….. 21
5.6 Test Method…….…… 21
5.7 Test Result…….. 22
6.Electrical Fast Transient/Burst Measurement……...…….. 23
6.1 Test Equipment ……..… 23
6.2 Block Diagram of Test Setup…… 23
6.3 Severity Levels …….. 23
6.4 EUT Operating Condition……. 24
6.5 Test procedure …….…….. 24
6.6 Test Method……. 24
6.7 Test Result…….. 25
7. Harmonic Current Requirements…… 26
8. Voltage Fluctuation and Filcker Test…….. 29
9. Surge Immunity Test……. 30
10. Conducted Immunity Test……. 31
11. Voltage Dip,interruptions Immunity Test……... 32
12. Photographs…… 33
13. EMI Reduction method during compliance Testing…… 39
Appendix A Circuit diagram, block diagram, User Manual
Appendix B Doc

1. Test Report Certification

Applicant	:	ZIPPY TECHNOLOGY CORP.
Manufacturer	:	ZIPPY TECHNOLOGY CORP.
EUT Description	:	Switching Power Supply

(A) FCC ID	:	N/A
(B) Model No.	:	**MRG-5800V4V**
(C) Serial No.	:	N/A
(D) Power Supply	:	115Vac/60Hz,230Vac/50Hz

MEASUREMENT PROCEDURE USED :

EN 55024 RULES
EN 55022 RULES

THE DEVICE DESCRIBED ABOVE WAS TESTED BY ZIPPY SHIN JIUH CORP. TO DETERMINE THE SEVERITY LEVELS THE DEVICE CAN ENDURE AND ITS PERFORMANCE CRITERION.
THE MEASUREMENT RESULTS ARE CONTAINED IN THIS TEST REPORT AND ZIPPY SHIN JIUH CORP. IS ASSUMED FULL RESPONSIBILITY FOR THE ACCURACY AND COMPLETENESS OF THESE MEASUREMENT.
ALSO, THIS REPORT SHOWS THAT THE EUT TO BE TECHNICALLY COMPLIANT WITH THE EN STANDARD.

Test Dated	:	SEP,02,2010
Test Engineer	:	Karen
Approve & Authorized Signer	:	Melon Lin

2. General Information

2.1 Production Description

Description	:	Switching Power Supply
Model Number	:	**MRG-5800V4V**
Applicant	:	ZIPPY TECHNOLOGY CORP.
Address	:	10F,No.50,MIN CHYUAN RD. SHIN-TIEN, TAIPEI HSIEN TAIWAN, R.O.C
FCC ID	:	N/A
Data Cable	:	N/A
PowerCord	:	Non-Shielded, detachable, 1.5m

2.2 Tested System Details

The FCC IDs for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

2.2.1 Resistor Load

Model Number	:	ELECTRONIC LOAD
Serial Number	:	N/A
FCC ID	:	N/A
Manufacturer	:	ZIPPY
Power	:	800W

2.3 Test Methodology

EMI Test:
Both conducted and radiated testing were performed according to the procedures in EN 55022
Radiated testing was performed at an antenna to EUT distance of 10 meters.

EMS Test:
Performed according to procedures in EN 61000 series regulations.

2.4 Test Facility

ZIPPY TECHNOLOGY CORP.
10F,No.50,MIN CHYUAN RD.
SHIN-TIEN, TAIPEI HSIEN
TAIWAN, R.O.C

3. Electronic-Magnetic Interference Test

3.1 Conducted Power Line Test

3.1.1 TEST Equipment's

The following test equipment's are used during the conducted power line tests:

Item	Instrument	Manufacture	Type No:	Last Calibration
1	TEST RECEIVER	ROHDE & SCHWARZ	ESHS10	Mar.,2010
2	LISN	ROHDE & SCHWARZ	ENV4200	Jan.,2010
3	COMPUTER	Acer	Power8000	N/A
4	PRINTER	EPSON	5700L	N/A
5	SHIELDED ROOM 4.0M*3.0M*3M			N/A

3.1.2 Block Diagram of Test Setup

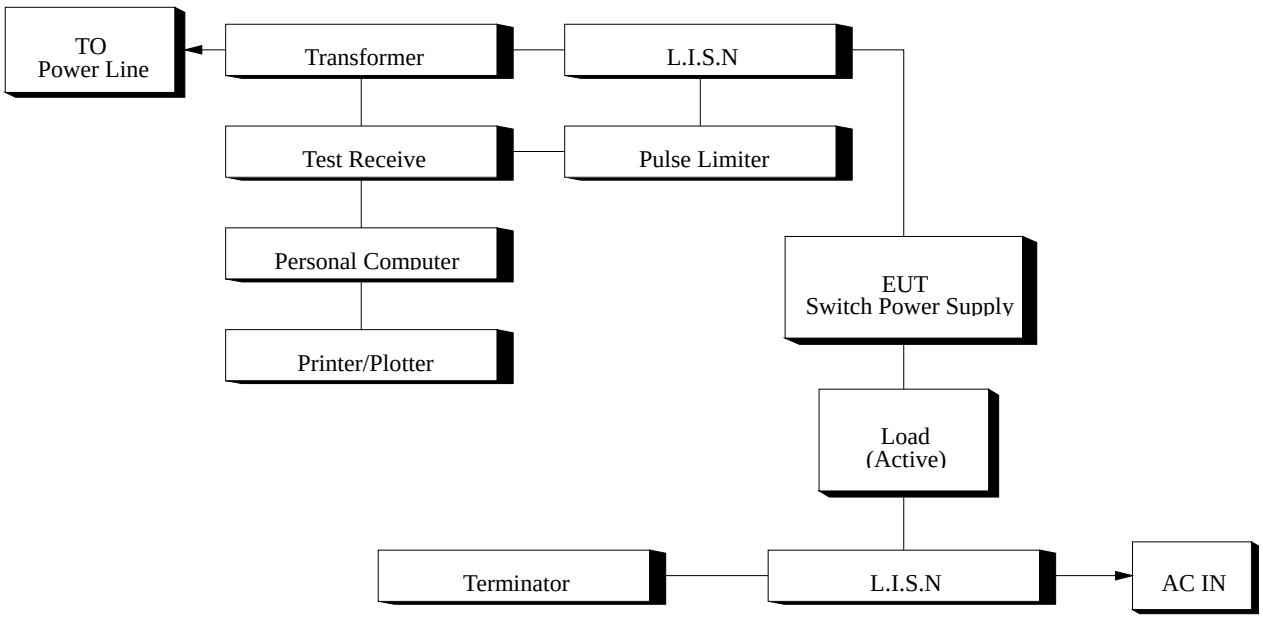

3.1.3 Conducted Powerline Emission Limit

Maximum RF Line Voltage dB(uV)		
Frequency	Class B	
MHz	QUASI-PEAK	AVERAGE
0.15 - 0.50	66-56	66-56
0.50 - 5.0	56	56
5.0 - 30	60	60

Remarks : In the Above Table, the tighter limit applies at the band edges.

3.1.4 EUT Configuration on Measurement

The equipment's which is listed 3.2 are installed on Conducted Power Line Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.1.5 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below :

3.1.5.1 Setup the EUT and simulators as shown on 3.2.

3.1.5.2 Turn on the power of all equipment's.

3.1.6 Conducted Emission Data

The measurement range of conducted emission which is from 0.15 MHz to 30 MHz was investigated. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range for all the test modes. Then the worst modes were reported the following data pages.

MODEL : MRG-5800V4V	REPORT NO. : 10090203

Conducted Emission Data

DATE OF TEST : SEP,02,2010 TEMPERATURE : 26℃

EUT : SWITCH POWER SUPPLY HUMIDITY : 65%

TEST MODE : **MRG-5800V4V** DISPLAY PATTERN : N/A

Frequency	Reading Level dBuV		Limites
MHz	Line 1	Line 2	DBuV
0.206	54.01	53.34	63.37
0.344	46.91	45.85	59.11
29.95	41.85	43.72	60.00

Remark：All readings are Quasi-Peak values.

ZIPPY EMC LAB

conduction test

EUT:	MRG-5800V4V SPS
Manuf:	ZIPPY TECH CO..LTD
Op Cond:	FULL LOAD
Operator:	EDMENT
Test Spec:	EN 55022-- Class B
Comment:	Load Condition(50 21 0.8 19 3.5)
	L220V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement:	Detectors:	X QP / + AV
	Meas Time:	see scan settings
	Peaks:	8
	Acc Margin:	25 dB

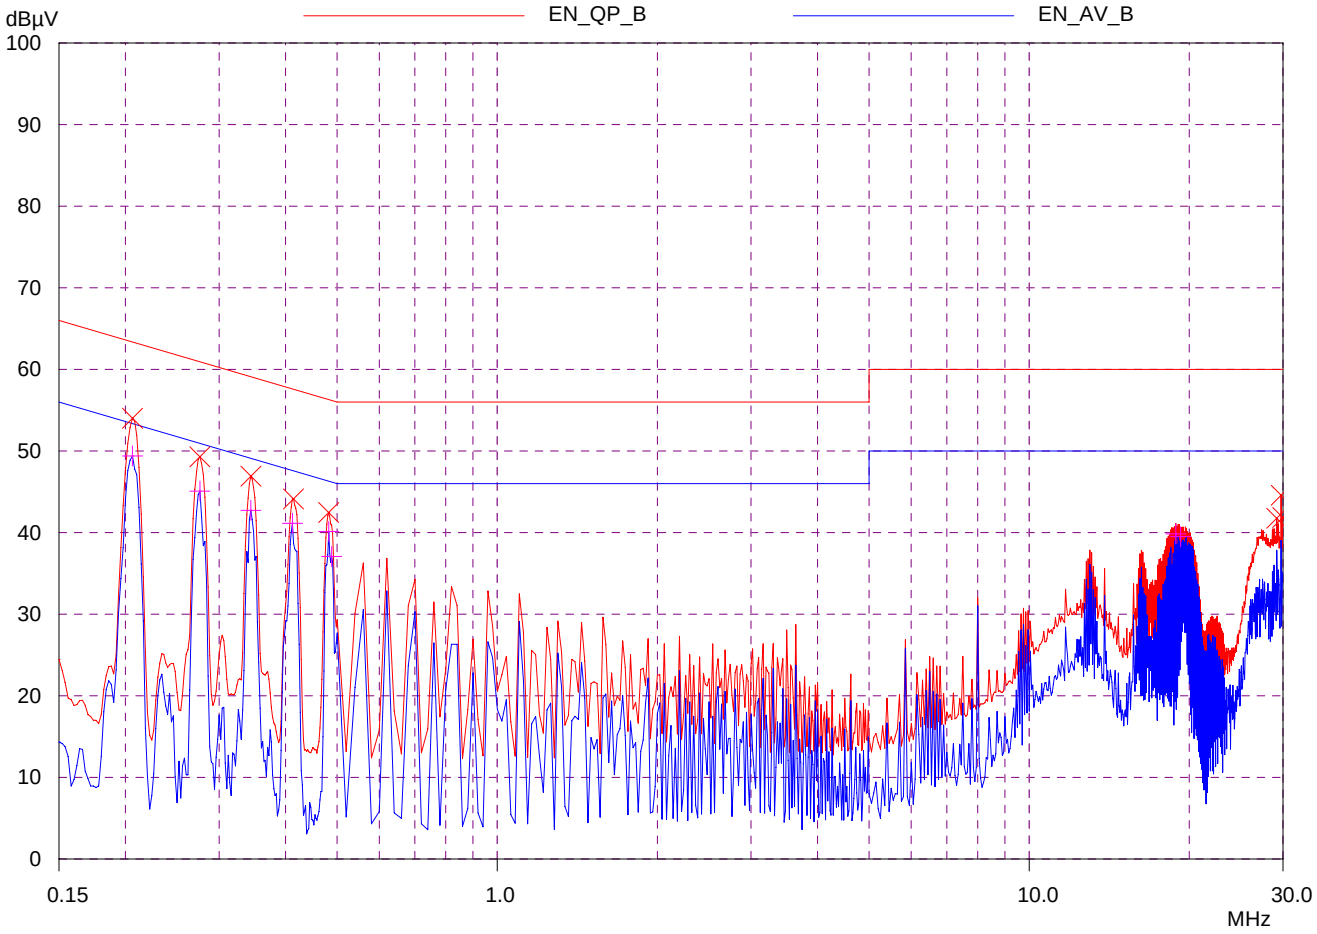

ZIPPY EMC LAB

conduction test

EUT: MRG-5800V4V SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator: EDMENT
Test Spec: EN 55022-- Class B
Comment: Load Condition(50 21 0.8 19 3.5)
L220V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement:
Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.206	54.01	63.37	9.36	N	gnd
0.276	49.28	60.94	11.66	N	gnd
0.344	46.91	59.11	12.20	N	gnd
0.414	44.13	57.57	13.44	N	gnd
0.482	42.46	56.30	13.84	N	gnd
29.2	41.76	60.00	18.24	N	gnd
29.75	44.58	60.00	15.42	N	gnd
29.95	41.85	60.00	18.15	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.206	49.40	53.37	3.97	N	gnd
0.276	45.08	50.94	5.86	N	gnd
0.344	42.73	49.11	6.38	N	gnd
0.412	41.15	47.61	6.46	N	gnd
0.482	40.13	46.30	6.17	N	gnd
0.488	37.08	46.20	9.12	N	gnd
18.85	39.86	50.00	10.14	N	gnd
19.25	39.51	50.00	10.49	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

ZIPPY EMC LAB

conduction test

EUT:	MRG-5800V4V SPS
Manuf:	ZIPPY TECH CO..LTD
Op Cond:	FULL LOAD
Operator:	EDMENT
Test Spec:	EN 55022-- Class B
Comment:	Load Condition(50 21 0.8 19 3.5) N220V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement:	Detectors:	X QP / + AV
	Meas Time:	see scan settings
	Peaks:	8
	Acc Margin:	25 dB

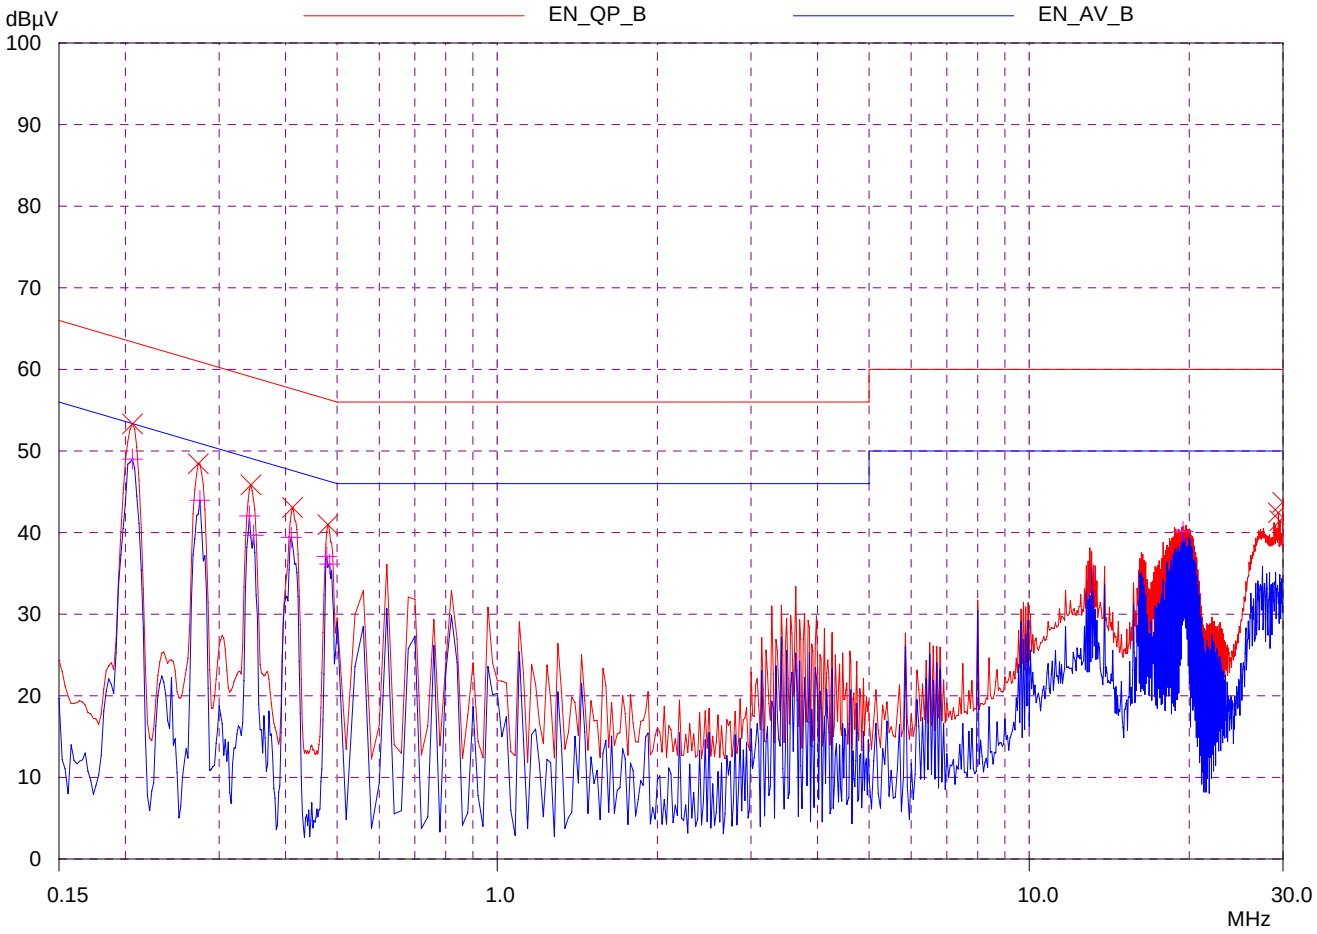

ZIPPY EMC LAB

conduction test

EUT: MRG-5800V4V SPS
Manuf: ZIPPY TECH CO..LTD
Op Cond: FULL LOAD
Operator: EDMENT
Test Spec: EN 55022-- Class B
Comment: Load Condition(50 21 0.8 19 3.5)
N220V

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150kHz	500kHz	2kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
500kHz	5MHz	20kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB
5MHz	30MHz	50kHz	10kHz	QP+AV	1msec	Auto	OFF	60dB

Transducer	No.	Start	Stop	Name
	1	9kHz	30MHz	CEB

Prescan Measurement:
Detectors: X QP / + AV
Meas Time: see scan settings
Peaks: 8
Acc Margin: 25 dB

Peak Search Results

Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB	Phase -	PE -
0.206	53.34	63.37	10.03	N	gnd
0.274	48.44	61.00	12.56	N	gnd
0.344	45.85	59.11	13.26	N	gnd
0.412	43.08	57.61	14.53	N	gnd
0.48	40.97	56.34	15.37	N	gnd
29.4	42.42	60.00	17.58	N	gnd
29.6	41.45	60.00	18.55	N	gnd
29.95	43.72	60.00	16.28	N	gnd

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB	Phase -	PE -
0.206	49.00	53.37	4.37	N	gnd
0.276	43.95	50.94	6.99	N	gnd
0.342	42.05	49.15	7.10	N	gnd
0.348	39.68	49.01	9.33	N	gnd
0.41	39.41	47.65	8.24	N	gnd
0.478	37.08	46.37	9.29	N	gnd
0.484	36.15	46.27	10.12	N	gnd
19.45	40.15	50.00	9.85	N	gnd

* limit exceeded

Indicated Phase/PE shows Configuration of max. Emission

3.2 Radiation Emission Test

3.2.1 Test Equipment

The following test equipment's are used during the radiated emission test :

Instrument	Manufacture	Type No:	Last Calibration
Spectrum Analyzer	H.P	8594A	May.,2010
Test Receiver	IFR System	A-7550	Jun.,2010
Preamplifier	H.P	8447D	May.,2010
Biconical Ant.	Emco	3110	Jun.,2010
Log-Periodic Ant.	Emco	3146	Jun.,2010
Dipole Antenna	Emco	3121C	May.,2010

3.2.2 Test Setup

3.2.2.1 Block Diagram of Connection between EUT and simulators

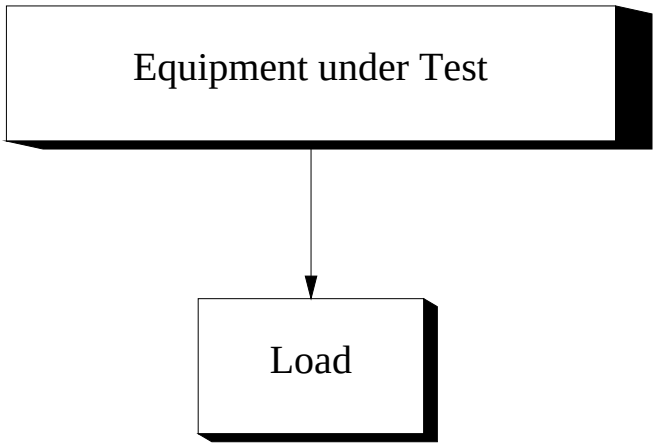

EUT: SWITCHING POWER SUPPLY

3.2.2.2 Open Field Test Site - description

The open field test site (OFTS) is designed to provide an environment in which repeatable tests of radiated emissions can be carried out.
It consists of a flat elliptical area as shown in the diagram below.
The equipment under test and the antenna are placed at the foci of the ellipse.

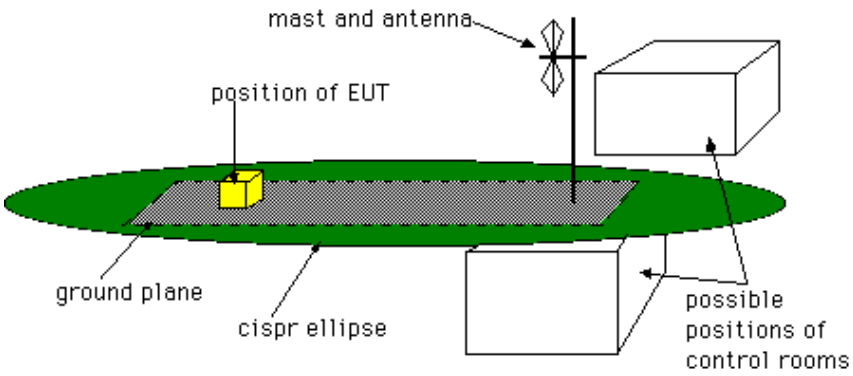

The antenna height should be remotely adjustable from 1m to 4m. Measuring instrumentation should be outside the ellipse at the position shown or in a room under the ground plane.
The whole or part of the site may be enclosed in an RF transparent building.
For precompliance testing a 3m test site with a fixed height antenna (at 1.5-2m height) and no metallic ground plane may be used. This may be a clear area on a car park or a grass area but should be away from large metallic structures.

3.2.3 Radiated Emission Limit

Class A Limits

Frequency	Distance	Field Strength
MHz	Meter	DB(uV/M)
30-230	3	50
230-1000	3	57

Remarks :
1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrumentantenna and the closed point of any part of the device or system.

3.2.4 EUT Configuration

The equipment's which is listed 4.2.1 are installed on Radiated Emission Test to meet the Commission requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.2.5 Operation Condition of EUT

Same as Conducted Power Line Test which is listed in 3.1.5 .

3.2.6 Radiated Emission Data

The measurement range of radiated emission which is from 30 MHz to 1000 MHz was investigated. The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range for all the test modes. Then the worst modes were reported the following data pages.

3.2.7 Test Photo and Setup

※During the radiated test, the power-supply has to test with chassis, which is not allowed to be operated stand-alone. (For user, final assembly has to comply with corresponding EMC-and safety-regulations.)

Radiated Emission Data

DATE OF TEST : _____ TEMPERATURE : _____

EUT : _____ HUMIDITY : _____

TEST MODE : _____ DISPLAY PATTERN : _____

Frequency	Emission Level	Limits	Remark
	Horizontal		
(MHz)	dBuV/m	dBuV/m	

Radiated Emission Data

DATE OF TEST : _____ TEMPERATURE : _____

EUT : _____ HUMIDITY : _____

TEST MODE : _____ DISPLAY PATTERN : _____

Frequency	Emission Level	Limits	Remark
	Vertical		
(MHz)	dBuV/m	dBuV/m	

Horizontal Curve

Vertical Curve

4. ESD Measurement

4.1 Test Equipment

The following test equipment's are used during the ESD test :

Instrument	Manufacture	Type No:	Last Calibration
ESD Simulator system	Keytek	MZ-15/EC	May.,2010
Electronic Load	D-RAM	Load-2000	N/A

4.2 Test Setup

4.2.1 Block Diagram of Connections between EUT and simulators

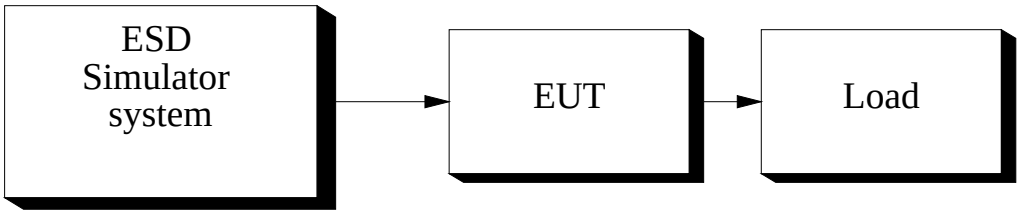

4.2.2 Test Setup of EUT

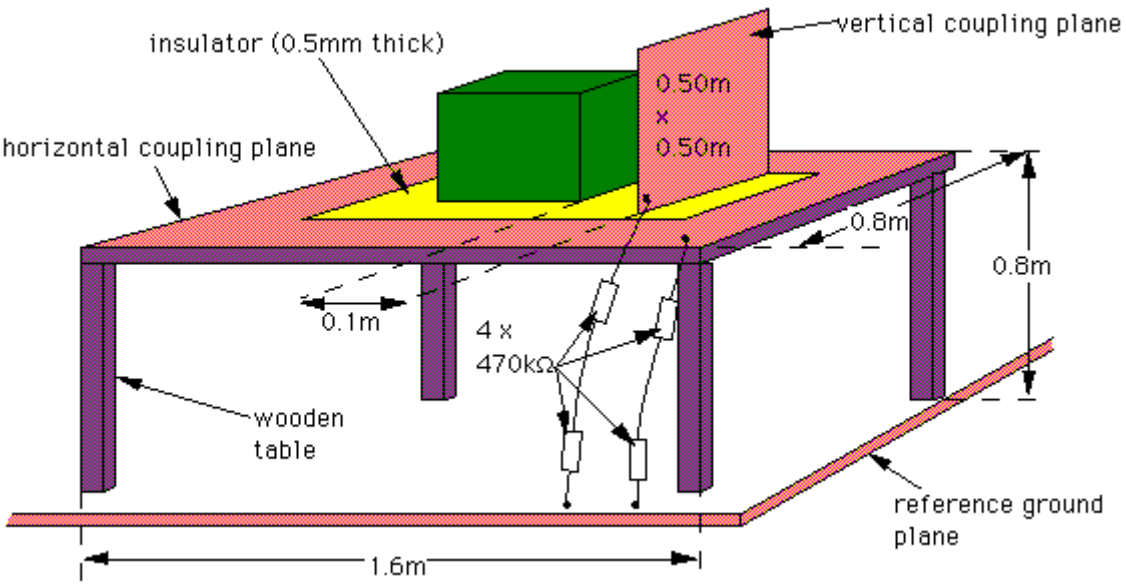

4.3 Severity Levels

LEVEL	TEST VOLTAGE CONTACT DISCHARGE	TEST VOLTAGE AIR DISCHARGE
1	2KV	2KV
2	4KV	4KV
3	6KV	6KV
4	8KV	8KV
X	SPECIAL	SPECIAL

4.4 EUT Operating Condition

1. Setup the EUT and Test Equipment as shown on 4.2
2. power on.

4.5 Test Procedure

Air Discharge:

This test was done above a non-conductive surfaces. The round discharge electrode about 30cm away will approach as fast as possible to touch test points of the EUT.
Discharge happens before the contact. This procedure is repeated ten times on one selected location.

4.6 Test Method

According to IEC 61000-4-2

4.7 Test Result

DATE OF TEST	: SEP,02,2010	TEMPERATURE	: 26℃
EUT	: SWITCH POWER SUPPLY	HUMIDITY	: 65%
TEST MODE	: **MRG-5800V4V**	DISPLAY PATTERN	: N/A

Item	Amount of discharge	Voltage	Results
Contact discharge	500	+2KV -2KV	Pass Pass
Contact discharge	500	+4KV -4KV	Pass Pass
Air discharge	500	+2KV -2KV	Pass Pass
Air discharge	500	+4KV -4KV	Pass Pass
Air discharge	500	+6KV -6KV	Pass Pass
Air discharge	500	+8KV -8KV	Pass Pass

※Input Voltage : AC 230Vac/50Hz

5. Radiated Susceptibility Measurement

5.1 Test Equipment

The following test equipment's are used during the RS test :

Instrument	Manufacture	Type No:	Last Calibration
Signal generator	H.P	8657A	Dec.,2009
Power amplifier	A&R	100A100	Dec.,2009
Field strength meter	A&R	FM2000	Oct.,2009
Field strength sensor	A&R	EP2000	Oct.,2009
Power antenna	A&R	AT1080	Oct.,2009

5.2 Block Diagram of Test Setup

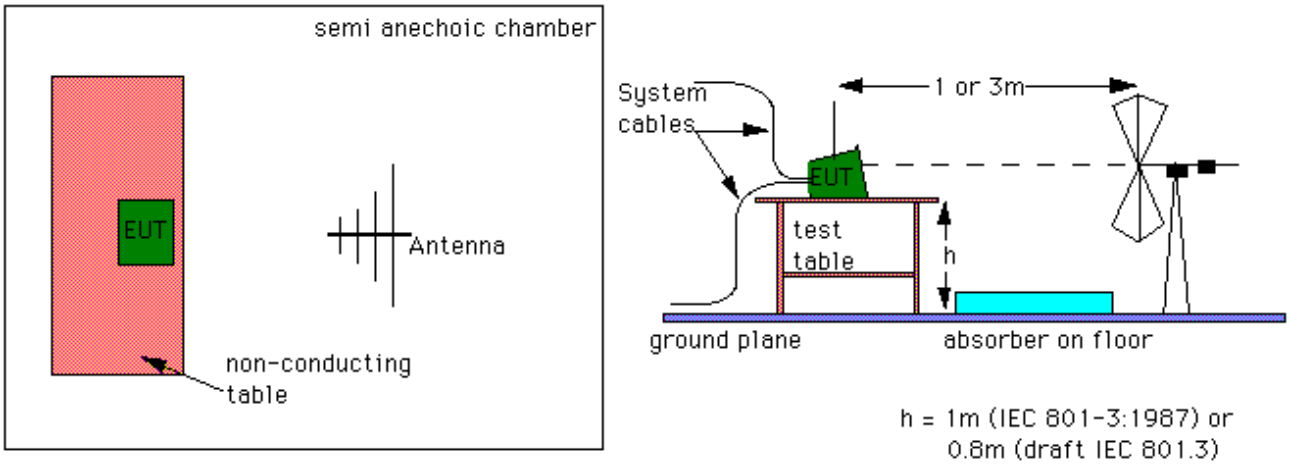

Antennas-layout

For the upper frequency range of 200 to 1000 MHz, antennas are the normal method of producing the required field strength. This is also carried out in an anechoic chamber or a screened room. If a screened room is used it must be damped . The anechoic chamber should be used for compliance testing, the screened room may be used for precompliance testing. The fields in the screened room will not be as uniform as those obtainable in an anechoic chamber and will also not be as repeatable. The EUT is placed on a non-conductive table, 0.8 m above the reference ground plane, which in many cases will be the floor of a screened room. According to the standards, the EUT should be oriented so that its most sensitive side is facing the antenna. In practice it can be difficult to decide beforehand which is the most sensitive side, and in most cases, a series of tests will be required with the EUT in several orientations.

5.3 Severity Levels

LEVEL	FIELD STRENGTH V/M
1	1
2	3
3	10
X	SPECIAL

5.4 EUT Operating Condition

Same as section 4.4.

5.5 Test Procedure

The EUT and load are placed on a table which is 0.8 meter above ground. The field sensor is also placed on the same table to monitor field strength from transmitting antenna.

EUT is set 1 meter away from the transmitting antenna which is mounted on an antenna each time.

The antenna is fixed 1 meter above ground. Both horizontal and vertical polarization of the antenna are set on measurement. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

All the scanning conditions are as follows :

Condition of Test	Remarks
1. Field Strength	3 V/M Level 2
2. Radiated Signal	80% Amplitude Modulated with a 1KHz Tone
3. Scanning Frequency	80 MHz-1 GHz
4. Sweep Time of Radiated	0.0015 Decade/s

5.6 Test Method

According to IEC 61000-4-3

5.7 Test Result

DATE OF TEST	: SEP,02,2010	TEMPERATURE	: 26℃
EUT	: SWITCH POWER SUPPLY	HUMIDITY	: 65%
TEST MODE	: **MRG-5800V4V**	DISPLAY PATTERN	: N/A

Frequency Range (MHz)	Position (Angle)	Polarity (HorV)	Field Strength (V/M)	Results
80-1000	0° (Front)	H	3	Pass
80-1000	90° (Right)	H	3	Pass
80-1000	180° (Back)	H	3	Pass
80-1000	270° (Left)	H	3	Pass
80-1000	0° (Front)	V	3	Pass
80-1000	90° (Right)	V	3	Pass
80-1000	180° (Back)	V	3	Pass
80-1000	270° (Left)	V	3	Pass

Test Result：Criteria A

6. Electrical Fast Transient / Burst Measurement

6.1 Test Equipment

The following test equipment's are used during the EFT tests :

Instrument	Manufacturer	Type No.	Last Calibration
Fast Transient / Burst enerator	Keytek	EMCpro	May.,2010

6.2 Block Diagram of Test Setup

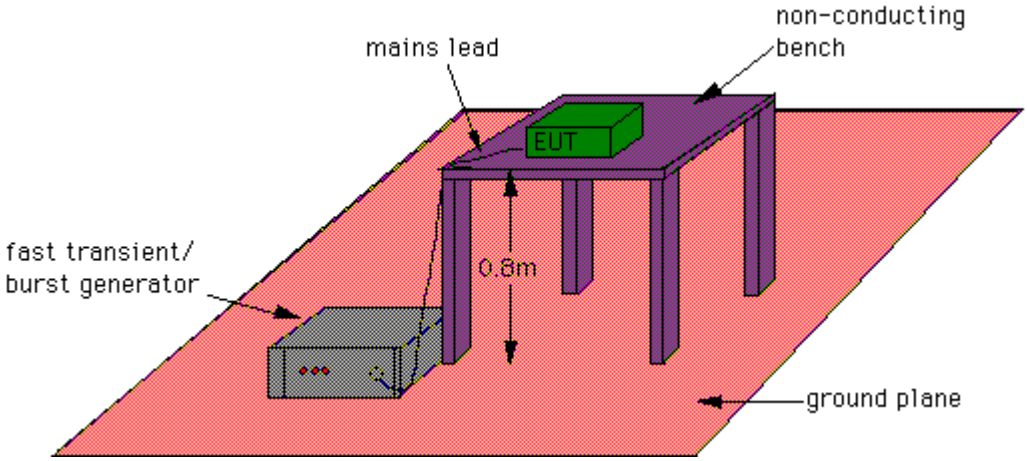

6.3 Severity Levels

Open Circuit Output Test Voltage +/- 10%	
Level	On power supply lines
1	0.5KV
2	1KV
3	2KV
4	4KV
X	SPECIAL

6.4 EUT Operation Condition

Same as section 4.4.

6.5 Test Procedure

The EUT and its load are placed on a table which is 0.8 meter above a metal ground plane measured 1m*1m min. And 0.65 mm thick min. And projected beyond the EUT by at least 0.1m on all sides.
The EUT is away from the walls of the test AC power line test is as follows:

For Ac power line test:
The EUT is connected to the power mains through a coupling device that directly couples the EFT interference signal.
Each of the Line and Neutral conductor is impressed with burst noise for 1 min.

6.6 Test Method

According to IEC 61000-4-4.

6.7 Test Result

DATE OF TEST	: SEP,02,2010	TEMPERATURE	: 26℃
EUT	: SWITCH POWER SUPPLY	HUMIDITY	: 65%
TEST MODE	: **MRG-5800V4V**	DISPLAY PATTERN	: N/A

Inject Line	Voltage KV	Inject time (sec)	Inject Method	Result
L1	+/-1	60	Direct	Pass
L2	+/-1	60	Direct	Pass
PE	+/-1	60	Direct	Pass
L1-L2	+/-1	60	Direct	Pass
L1-PE	+/-1	60	Direct	Pass
L2-PE	+/-1	60	Direct	Pass
L1,L2-PE	+/-1	60	Direct	Pass

※Input Voltage : AC 230Vac/50Hz

7. Harmonic Current Test

DATE OF TEST : SEP,02,2010 TEMPERATURE : 26℃

EUT : SWITCH POWER SUPPLY HUMIDITY : 65%

TEST MODE : **MRG-5800V4V** DISPLAY PATTERN : N/A

Item	Reading Leve A		Item	Reading Leve A	
	A	Limites		A	Limites
1	4.153				
3	0.447	2.300			
5	0.146	1.140			
7	0.054	0.770			
9	0.030	0.400			
11	0.014	0.330			
13	0.013	0.210			
15	0.011	0.150			
17	0.009	0.132			
19	0.008	0.118			
21	0.006	0.107			
23	0.005	0.098			
25	0.003	0.090			
27	0.002	0.083			
29	0.001	0.078			
31	0.001	0.073			
33	0.003	0.068			
35	0.003	0.064			
37	0.004	0.061			
39	0.004	0.058			

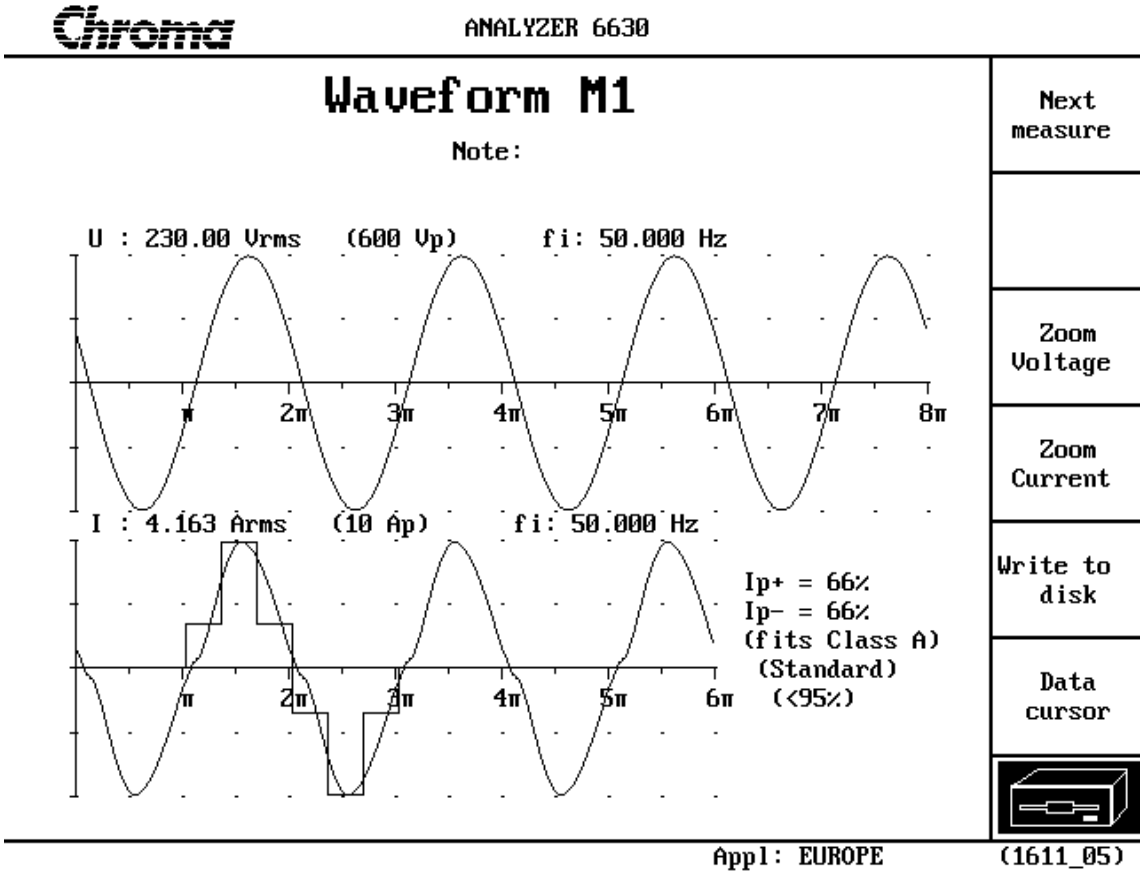
Chroma
ANALYZER 6630
Waveform M1
Note:
U : 230.00 Vrms (600 Vp) fi: 50.000 Hz
π 2π 3π 4π 5π 6π 7π 8π
I : 4.163 Arms (10 Ap) fi: 50.000 Hz
Ip+ = 66%
Ip- = 66%
(fits Class A)
(Standard)
(<95%)
π 2π 3π 4π 5π 6π
Next measure
Zoom Voltage
Zoom Current
Write to disk
Data cursor
Appl: EUROPE
(1611_05)

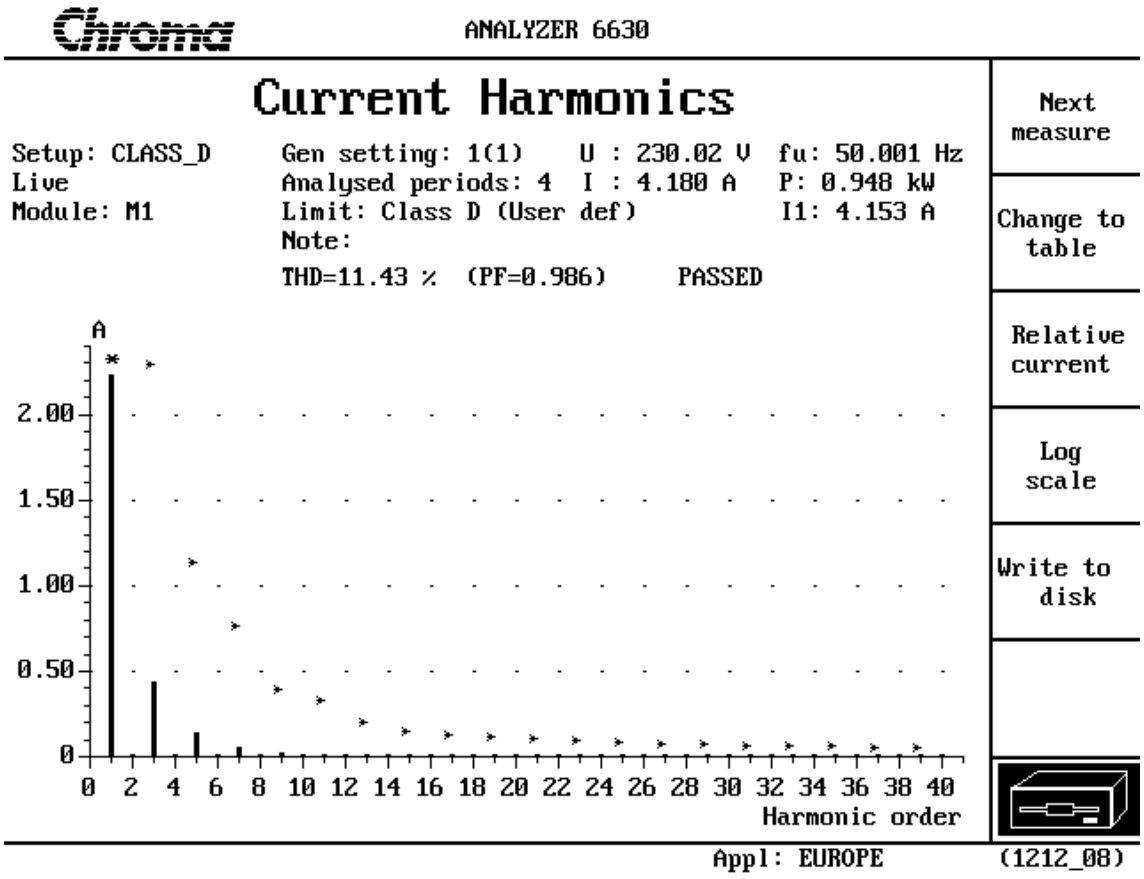
Chroma
ANALYZER 6630
Current Harmonics
Setup: CLASS_D
Live
Module: M1
Gen setting: 1(1)
Analysed periods: 4
Limit: Class D (User def)
Note:
U : 230.02 V
I : 4.180 A
fu: 50.001 Hz
P: 0.948 kW
I1: 4.153 A
THD=11.43 % (PF=0.986) PASSED
A
2.00
1.50
1.00
0.50
0
0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40
Harmonic order
Next measure
Change to table
Relative current
Log scale
Write to disk
Appl: EUROPE
(1212_08)

Chroma ANALYZER 6630

Current Harmonics

Setup: CLASS_D
Live
Module: M1

Gen setting: 1(1) U : 230.02 V fu: 50.001 Hz
Analysed periods: 4 I : 4.180 A P: 0.948 kW
Limit: Class D (User def) I1: 4.153 A
Note:

THD=11.43 % (PF=0.986) PASSED

No	A	Lim A	No	A	Lim A	No	A	Lim A
1	4.153		15	0.011	0.150	29	0.001	0.078
2	0.001		16	0.000		30	0.000	
3	0.447	2.300	17	0.009	0.132	31	0.001	0.073
4	0.000		18	0.000		32	0.000	
5	0.146	1.140	19	0.008	0.118	33	0.003	0.068
6	0.000		20	0.000		34	0.000	
7	0.054	0.770	21	0.006	0.107	35	0.003	0.064
8	0.000		22	0.000		36	0.000	
9	0.030	0.400	23	0.005	0.098	37	0.004	0.061
10	0.000		24	0.000		38	0.000	
11	0.014	0.330	25	0.003	0.090	39	0.004	0.058
12	0.000		26	0.000		40	0.000	
13	0.013	0.210	27	0.002	0.083			
14	0.000		28	0.000				

Current range: 10 Ap

Next measure
Change to bar graph
Relative current
Write to disk

Appl: EUROPE (1212_09)

8. Voltage Fluctuation And Flicker Test

DATE OF TEST : SEP,02,2010 TEMPERATURE : 26℃

EUT : SWITCH POWER SUPPLY HUMIDITY : 65%

TEST MODE : **MRG-5800V4V** DISPLAY PATTERN : N/A

Item	Reading	Limit	Result
Pst	0.000	1.00	Pass
P1t	0.000	0.65	Pass
Dc (%)	0.000	3.00	Pass
Dmax (%)	0.000	4.00	Pass
Dt (%)	0.000	0.20	Pass

9. Surge Immunity Test

DATE OF TEST : SEP,02,2010 TEMPERATURE : 26℃

EUT : SWITCH POWER SUPPLY HUMIDITY : 65%

TEST MODE : **MRG-5800V4V** DISPLAY PATTERN : N/A

Wavefor	Voltage	Output:LC	Phs Ref	Phs Ang	Tests	Delay	Result
12 Ohm	-2000V	MAINS:L1/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L1/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L1/PE	L1	270 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L1/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L1/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L1/PE	L1	270 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L2/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L2/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	-2000V	MAINS:L2/PE	L1	270 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L2/PE	L1	0 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L2/PE	L1	90 deg.	5	60 sec	Pass
12 Ohm	2000V	MAINS:L2/PE	L1	270 deg.	5	60 sec	Pass
2 Ohm	-1000V	MAINS:L1/L2	L1	0 deg.	5	60 sec	Pass
2 Ohm	-1000V	MAINS:L1/L2	L1	90 deg.	5	60 sec	Pass
2 Ohm	-1000V	MAINS:L1/L2	L1	270 deg.	5	60 sec	Pass
2 Ohm	1000V	MAINS:L1/L2	L1	0 deg.	5	60 sec	Pass
2 Ohm	1000V	MAINS:L1/L2	L1	90 deg.	5	60 sec	Pass
2 Ohm	1000V	MAINS:L1/L2	L1	270 deg.	5	60 sec	Pass

10. Conducted Immunity Test

DATE OF TEST	: SEP,02,2010	TEMPERATURE	: 26℃
EUT	: SWITCH POWER SUPPLY	HUMIDITY	: 65%
TEST MODE	: **MRG-5800V4V**	DISPLAY PATTERN	: N/A

Frequency Range (MHz)	Polarity (HorV)	Field Strength (V/M)	Results
0.15-80	H	3	Pass

INJECTION TYPE：DIRECT CDN Type M3

TEST CONDITION：Step:1% Dwell Time : 3sec

Test result：Criteria A

11. Voltage Dip, Interruptions Immiunity Test

DATE OF TEST : SEP,02,2010 TEMPERATURE : 26℃

EUT : SWITCH POWER SUPPLY HUMIDITY : 65%

TEST MODE : **MRG-5800V4V** DISPLAY PATTERN : N/A

Test Voltage	Phase Angle	Reduction %	Duration (Periods)	Performance		Result
				Required	Observation	
AC 115V	0 deg.	>95%	0.5	B	A	Pass
	90 deg.		0.5	B	A	Pass
	180 deg.		0.5	B	A	Pass
	270 deg.		0.5	B	A	Pass
	0 deg.	30%	25	C	A	Pass
	90 deg.		25	C	A	Pass
	180 deg.		25	C	A	Pass
	270 deg.		25	C	A	Pass
	0 deg.	>95%	250	C	C	Pass
	90 deg.		250	C	C	Pass
	180 deg.		250	C	C	Pass
	270 deg.		250	C	C	Pass
AC 230V	0 deg.	>95%	0.5	B	A	Pass
	90 deg.		0.5	B	A	Pass
	180 deg.		0.5	B	A	Pass
	270 deg.		0.5	B	A	Pass
	0 deg.	30%	25	C	A	Pass
	90 deg.		25	C	A	Pass
	180 deg.		25	C	A	Pass
	270 deg.		25	C	A	Pass
	0 deg.	>95%	250	C	C	Pass
	90 deg.		250	C	C	Pass
	180 deg.		250	C	C	Pass
	270 deg.		250	C	C	Pass

12. Photographs

1.Front view of Power Supply
2.Back view of Power Supply

3.Front view of Power Supply
4.Back view of Power Supply

5.Component side of Mainboard
6.Solder side of Mainboard

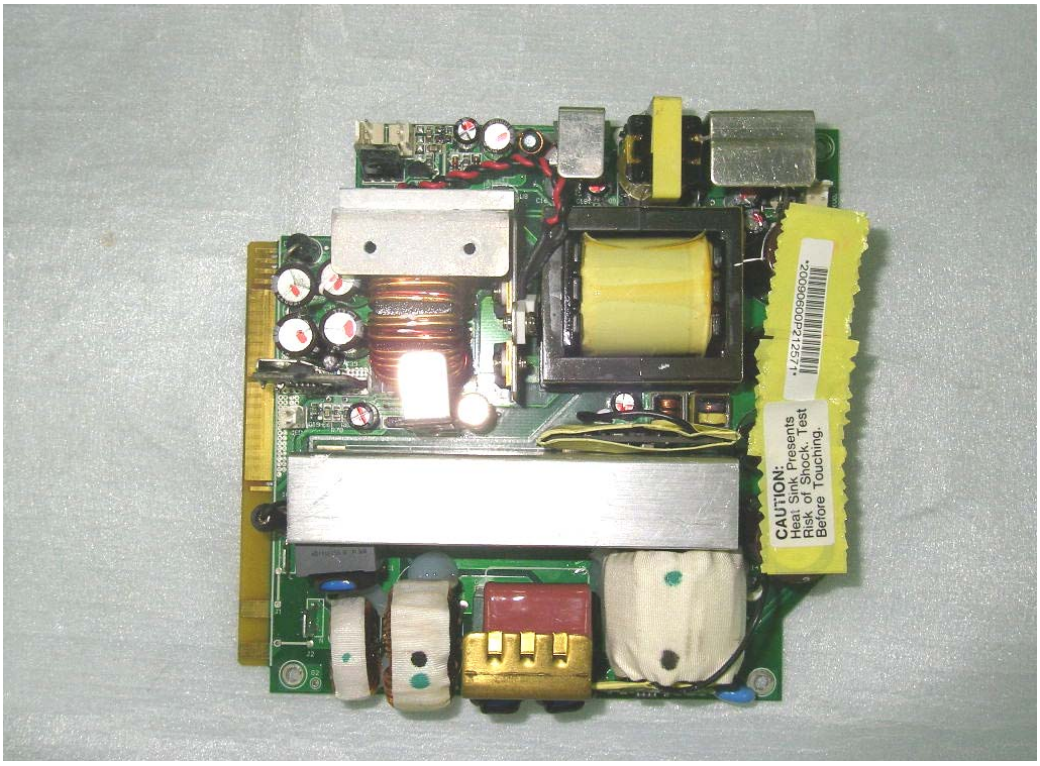

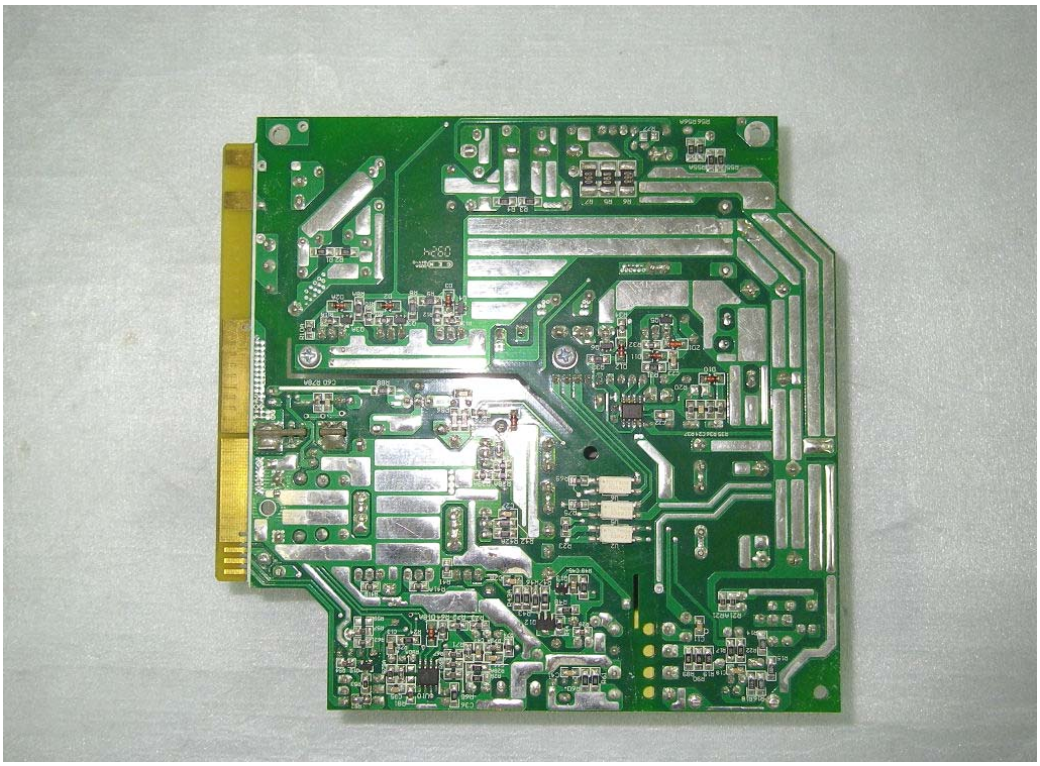

7.Component side of Mainboard
8.Solder side of Mainboard

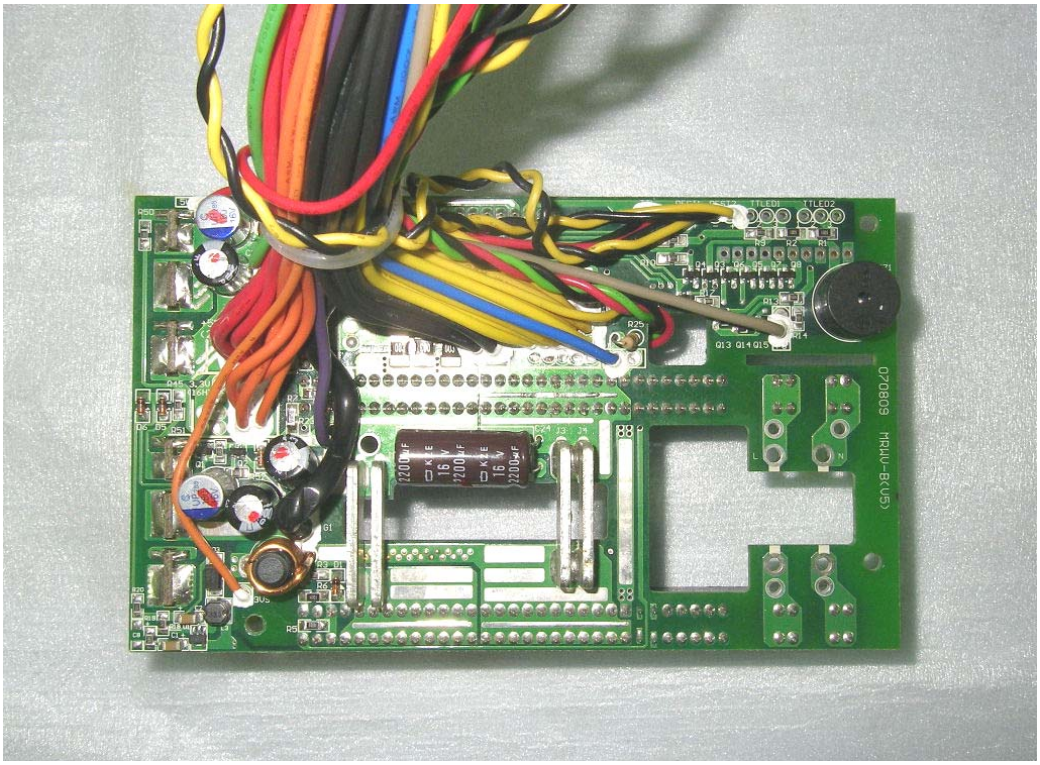

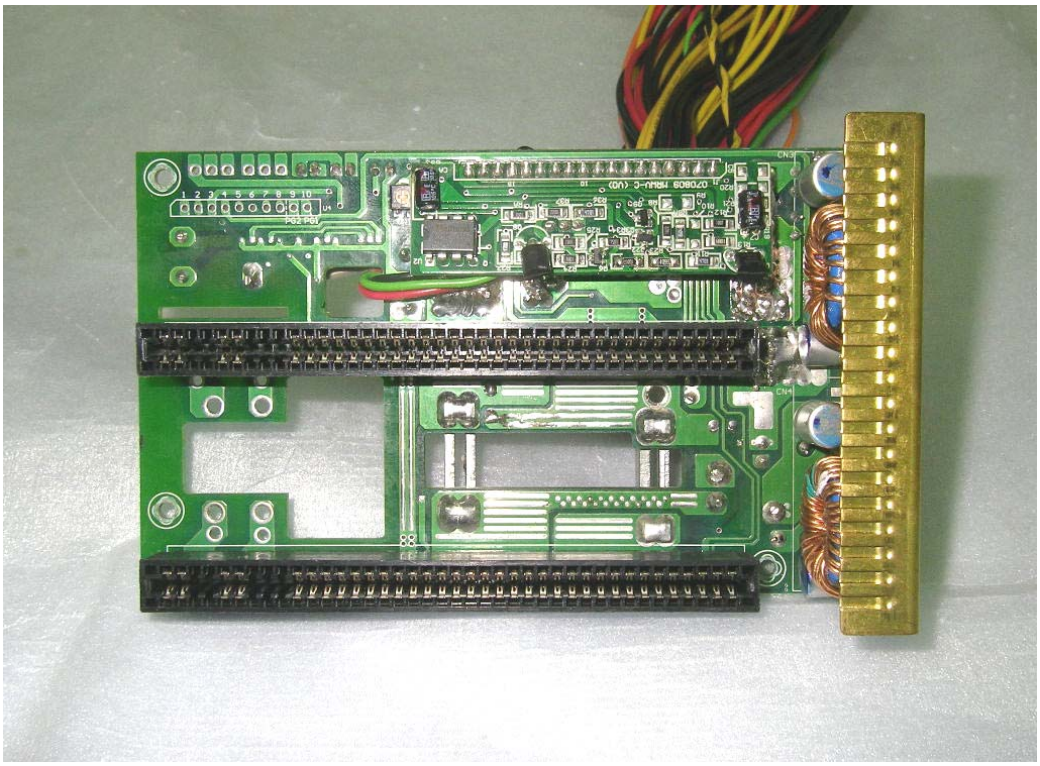

9. Inside view of Power Supply
10. Inside view of Power Supply

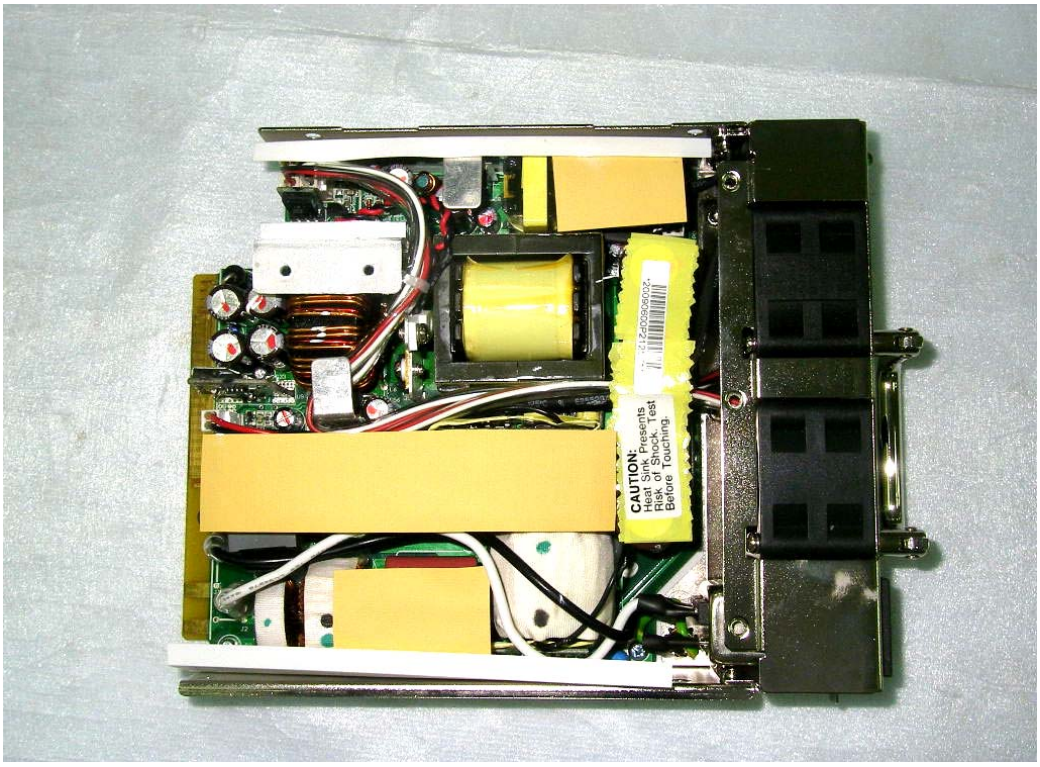

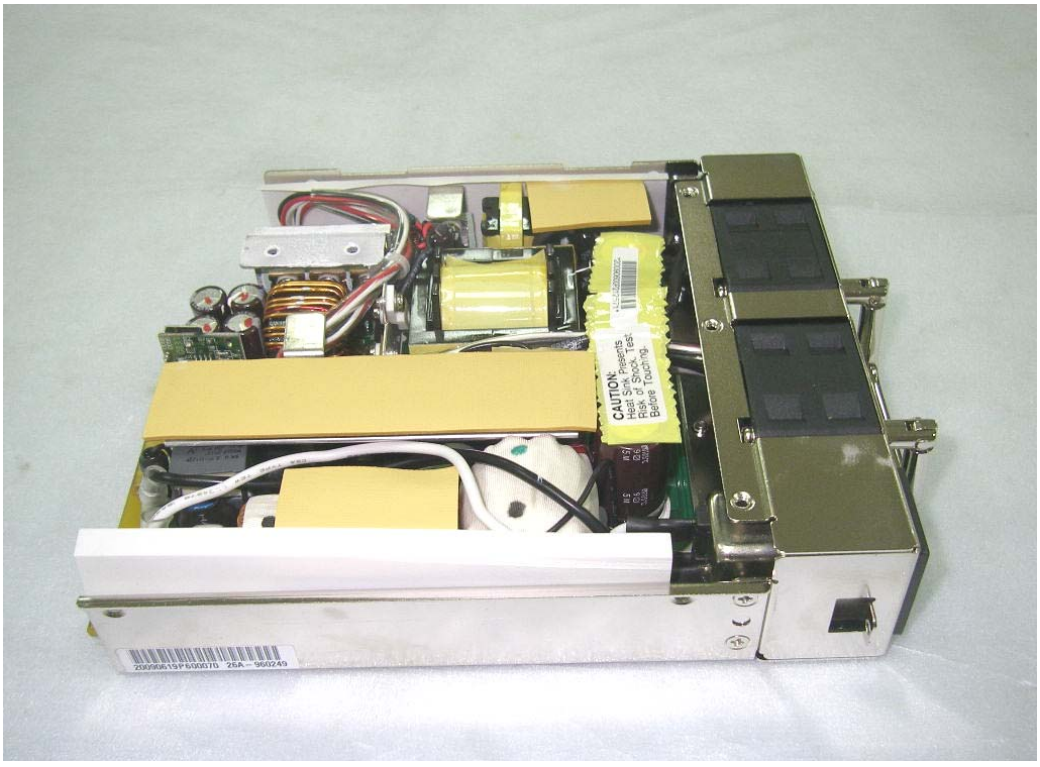

11.Inside view of Power Supply
12.Test view

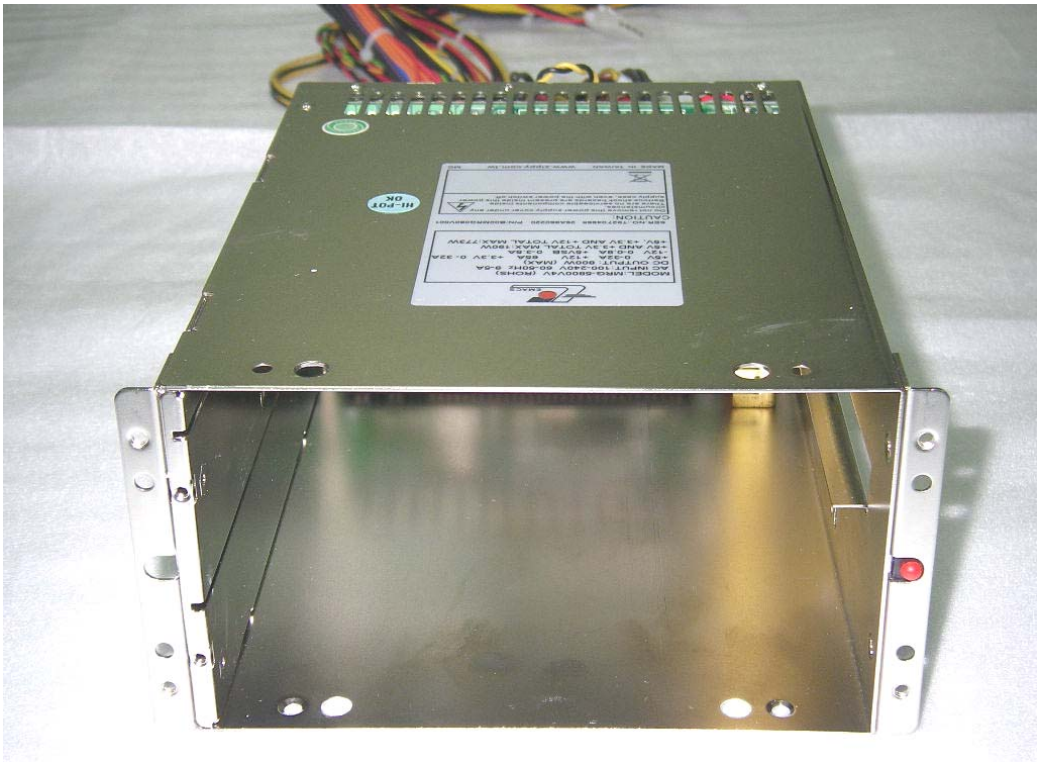

13. EMI Reduction Method During Compliance Testing

1.No modification was made during test.